

barenaked™

WEAR RESISTANT DECK TILE



USN
WEAR
RESISTANT
DECK TILE
MIL PRF 32170a
COMPLIANT
QPL LISTED
TYPE I - Class 1
TYPE II - Class 1

barenaked LT™

WEAR RESISTANT DECK TILE




LT 1122
Canadian Maple



LT 1142
Golden Oak



LT 1151
American Cherry

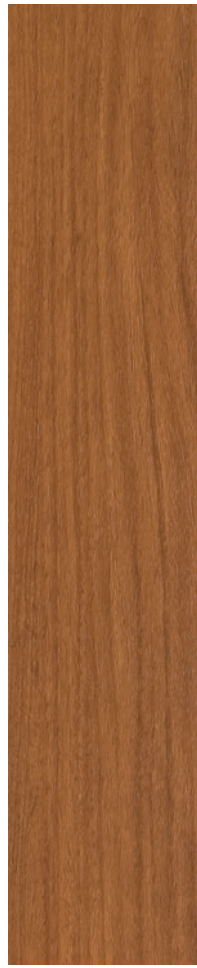


LT 1161
Royal Quince



LT 1181
Honduran Mahogany



LT 1191
Rosewood

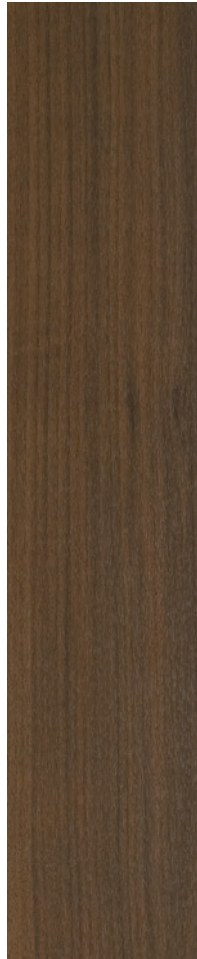

LT 1101
French Walnut



LT 1131
Smoked Ash

barenaked LT™

WEAR RESISTANT DECK TILE

TECHNICAL DATA	
THICKNESS	.08" (2.0mm)
LENGTH / WIDTH	36"L (914mm) x 4"W (102mm)
WEIGHT	0.7 lbs. / sq. ft.
SQ. FT./CRT	30 sq. ft.
PCS/CRT	30 pcs
WARRANTY	15 YEARS

COMPOSITION	
PVC & HALOGENS	NONE
PLASTICIZERS	NONE

FIRE SPECIFICATIONS	
ASTM E648 CRITICAL RADIANT FLUX	≥0.45 w/cm ² Class I
ASTM E662 SMOKE GENERATION	<450 DM Corrected
FIRE TEST DATA	Complies with NFPA 99 & NFPA 101 Requirements

PERFORMANCE SPECIFICATIONS	
ASTM 970 STATIC LOAD LIMIT	3000 PSI @ maximum limit
ASTM F510 TABER ABRASION	Pass 0.08 grams loss of mass 80 grit abrasive & 1 kg load @ 1,000 cycles
ASTM D4060 TABER ABRASION	Pass 0.01 grams loss of mass CS-17 wheel & 1 kg load @ 1,000 cycles
ISO 4918 CASTOR CHAIR TEST	5.0 Excellent - No change or negligible change 25,000 cycles bonded with standard adhesive
PRE CONSUMER RECYCLED CONTENT	38%
VOC EMISSIONS CA01350	VERY LOW EMITTING MATERIAL FLOORSORE CERTIFIED SCS-FS-02256
ASTM F925 CHEMICAL RESISTANCE	No Change. Excellent Resistance to acids, alkalis and solvents
ASTM D2047 STATIC COEFFICIENT OF FRICTION	≥0.6 SCOF COMPLIES WITH ADA GUIDELINES
DYNAMIC COEFFICIENT OF FRICTION ANSI B101.3	ACCEPTABLE / HIGH TRACTION - Wet
ASTM E2179 IMPACT INSULATION CLASS (DELTA)	Δ IIC - 8 dB
AATCC 134 STATIC GENERATION	<2.0 kV, 20% RH

* barenaked floors™ LT Plank Collection™ is free from the chemicals of concern stated in the Living Building Challenge Red List

PHILIP "P.J." HUGHES
Fed Gov / DoD / GSA Account Manager
SDVOSB GSA SCHEDULE • GS-27F-0036V
VAMC VIP Verified • www.vip.vetbiz.gov
CAGE Code: 4RRA8
PH: 937.829.8316
phughes@teknoflor.com



Schedule
GS-27F-0504H • GS-27F-0036V
GS-27F-0015V



TEKNOFLOR®